



COMFORTABLE
CONCRETE 2.0

Milliken™

COMFORTABLE CONCRETE 2.0

Comfortable Concrete is a luxurious carpet tile collection, inspired by the enduring popularity of concrete as an interior finish. Comprising three designs, 'Laid Bare', 'Urban Drama' and 'Urban Poetry', the collection combines the aesthetic and texture of raw concrete with the warmth and comfort of carpet.

Colours range from urban greys to rich greens and deep reds inspired by the extreme elements of our environment, to soft and chalky neutrals to embrace a calm and mindful mood.




Level 12, 240 Queen Street, Brisbane, Queensland | COMUNITI and Focus Fitout | Photographer: Mindi Cooke
Urban Drama in Slate Ocean (UDR133-13-19), Slate Gray (UDR133-13-207) and Slate Blush (UDR133-13-263) | Monolithic Installation



LAID BARE IN POWDER
LDB154-180



URBAN POETRY IN POWDER ROSE
UPY154-180-261

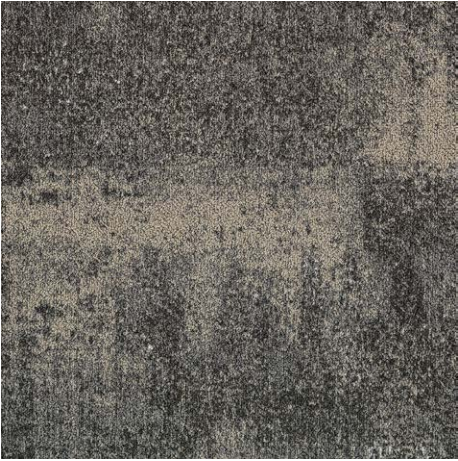

URBAN DRAMA IN SLATE GRAY
UDR133-13-207





Urban Poetry in Powder Sky (UPY154-180-140) and Powder Gray (UPY154-180) | Monolithic Installation



Level 12, 240 Queen Street, Brisbane, Queensland | COMUNITI and Focus Fitout | Photographer: Mindi Cooke
Urban Drama in Slate Ocean (UDR133-13-19) and Slate Gray (UDR133-13-207) | Monolithic Installation



Te Taura Whiri | Te Reo Maori, The Maori Language Commission Head Office, New Zealand | RCG
Photographer: Mark Scowan
Laid Bare in Custom Colourway | Monolithic Installation





Urban Drama in Slate Parrot (UDR133-13-202) and Slate Gray (UDR133-13-207) | Monolithic Installation





Level 12, 240 Queen Street, Brisbane, Queensland | COMUNITI and Focus Fitout | Photographer: Mindi Cooke
 Urban Drama in Slate Ocean (UDR133-13-19) and Slate Gray (UDR133-13-207) | Monolithic Installation

COLOURWAY


Laid Bare



LDB13-207 SAND




LDB154-180 POWDER




LDB119-153 CHALK



LDB27-207 DUST



LDB119-174 CAST




LDB133-13 SLATE


Urban Drama



UDR133-13-263
SLATE BLUSH




UDR133-13-189
SLATE AMBER



UDR133-13-19
SLATE OCEAN




UDR133-13-202
SLATE PARROT




UDR133-13-207
SLATE GRAY


Urban Poetry




UPY154-180-261
POWDER ROSE




UPY154-180-188
POWDER SUN



UPY154-180-151
POWDER VIOLET



UPY154-180-140
POWDER SKY



UPY154-180
POWDER GRAY

Milliken



Self-sanitising Carpet

Integrated Infection Control



MGUARD+ treatment kills 99% of the SARS-CoV-2 virus within 2 hours of contact with Milliken PrintWorks™ carpet tiles.

MGUARD+ treatment kills 99% of *S. aureus*, *E. coli*, *K. pneumoniae* in 24 hours as per AATCC 174-2.

Duration of protection varies with use.

Powered by HealthGuard®.

Only available in Australia and New Zealand.

Declare.





WellBAC®

Milliken WellBAC® open cell foam cushion provides superior durability, appearance retention and cushioning.



Up to 24% greater underfoot comfort for enhanced ergonomics whilst standing.



Up to 50% improved acoustics for quieter, more productive spaces.



Industry leading moisture management with non-reactive backings to enhance the installation process.



3rd party Verified Red-List Free products for occupant and installer well-being.



Enhanced Indoor Air Quality (Low VOC) for improved occupant and installer well-being.

FACE FABRIC

Patterns and structures made up of nylon yarns with our state of the art tufting technology.

PRIMARY BACKING

The face yarn is tufted through a high quality non-woven textile. The structure of the textile holds the yarn in place acting as the primary backing.

PRECOAT

The precoat layer locks the tufted yarns in the primary backing to ensure good tuft bind strength between the yarns and the backing.

FIBERGLASS

A high quality fiberglass layer is embedded in the polyolefin compound to ensure dimensional stability of the tile.

SECONDARY BACKING

Proprietary Polyolefin compound layer formulated by Milliken R&D scientists to create a durable and stable tile. Our formulation does not contain PVC or plasticizers.


PREMIUM, THICKER CUSHION

WellBAC® Comfort and Comfort Plus incorporate a premium cushion layer, designed to provide additional health & wellness benefits. Milliken's cushion is made from polyurethane foam.

FELT BACK

A protective non-woven textile layer provides a breathable non-reactive finish, which enhances health and wellness.

Milliken's standard cushion backing system — offering enhanced underfoot comfort, acoustic and wear performance.

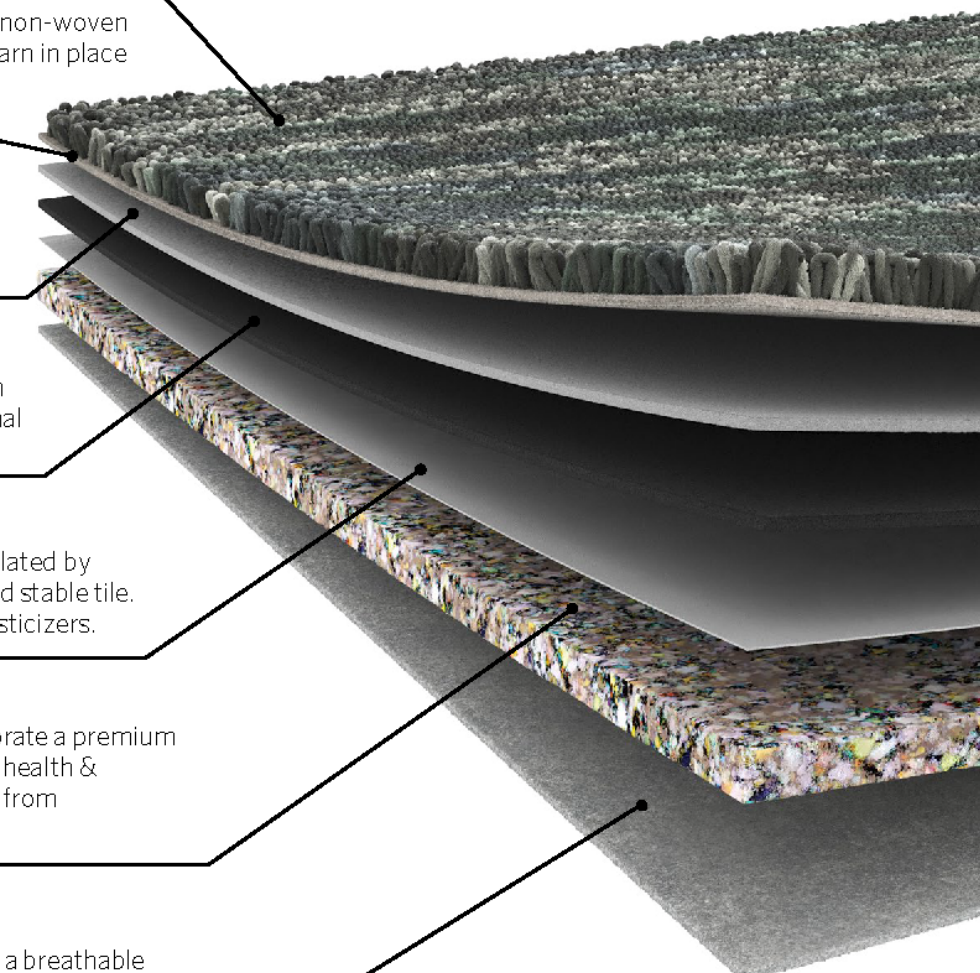

Milliken™

COMFORTABLE CONCRETE 2.0

Laid Bare | Urban Drama | Urban Poetry

SPECIFICATION



When you choose M/PACT™ products, you can be sure your choice is carbon neutral. M/PACT™ carbon neutral products offset the raw materials and manufacturing carbon footprint* by using 3rd party Verified Carbon Standard Credits that support renewable energy and carbon reduction technologies to help fight climate change.

*as calculated and verified through a ISO14025/ISO14040 compliant LCA and published in third party EPD.

Standard Backing	Cushion Backing WellBAC® Comfort Plus (PVC FREE) (Non-Reactive Cushion Backing)
Acoustic Value	Noise Reduction Coefficient - $NRC \geq 0.25$ Impact Sound Pressure Level - $Ln,w \leq 45dB$
Concrete Slab Moisture Mitigation	Site-Related Solutions (SRS). Milliken Cushion backed tile + Non-Reactive Standard adhesive means installation 60 days after a new concrete pour, fully warranted no moisture testing required. Refer millikenfloors.com.au
Antiviral Antibacterial	MGUARD+ Antiviral and Antibacterial Treatment. Further information refer to millikenfloors.com.au

Construction	Tufted, Textured Loop	Lightfastness (AATCC 16E)	≥ 4.0 at 80 Hours
Tile Size	50cm x 50cm	Static Electricity	$\leq 3.5KV$
Yarn Type	Milliken Certified 100% Nylon	(AATCC-134) 20% R.H., 70°F	
Stain Resist	StainSmart®	Indoor Air Quality	$\leq 0.5mg/m^3$ (GLP0793)
Soil Release		CRI Green Label Plus™	
Dye Method	PrintWorks™	VOC	Pass (ISO 10580:2010)
Gauge	1/10	ACCS Grading	CEHD 4*, REHD2 6*, Suitable for Stairs
Stitches Per Inch	10.3	Environmental	ECS Grading - Level 4 (Certificate No. 20146)
Tufts	$103/in^2$ (1,595/100cm ²)		Declare - 3rd Party Verified RED LIST FREE
Recyclable	100%		Cradle to Cradle - Silver
Nominal Total Thickness	10mm		Carbon Neutral
Nominal Total Weight	104 oz/yd ² (3,526 g/m ²)		Environmental Product Declaration (EPD)
Nominal Pile Thickness	2.79mm		Health Product Declaration (HPD)
Flammability (Radiant Panel Test)	CHF/CRF = 4.2kW/m ² , Smoke value = 271% min		

Recommended Installation Method(s)	Monolithic
Recommended Area of Use	Commercial Extra Heavy Duty
Warranties	15-year Wear Warranty 15-year Dimensional Stability Warranty 15-year Anti-Static Warranty 15-year Castor Chair Wear Warranty



Alliance
Founding
Member

Declare.



Milliken

Laid Bare in Powder | LDB154-180 | Monolithic Installation

Australia:
Toll Free: 1800 668 372
New Zealand:
Toll Free: 0800 668 372
www.millikenfloors.com.au
(Australia & New Zealand)

This WellBAC® cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.

© 2022 Milliken & Company | Design © Milliken & Company